
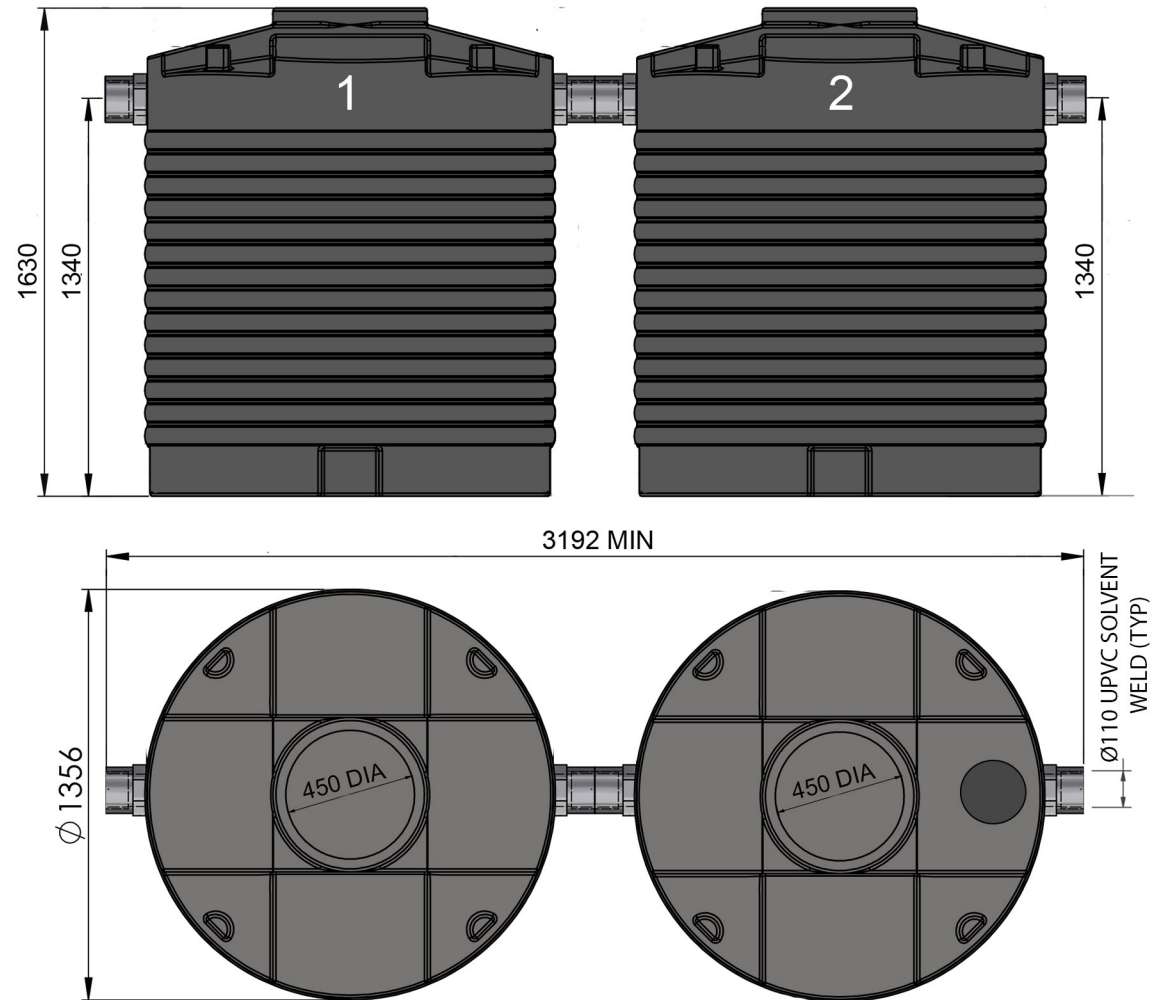


# GCT-PE SUPERCEPTOR 10™ Class I

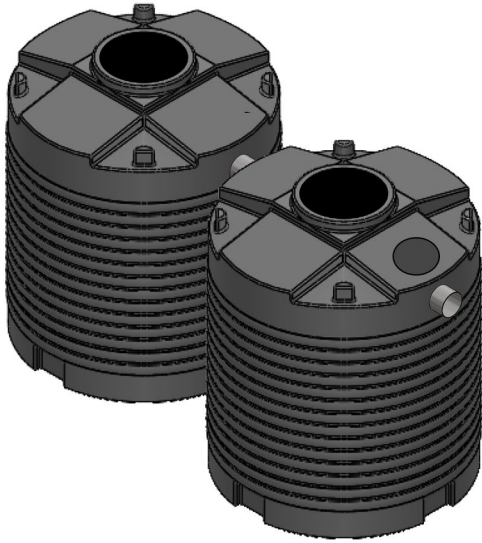

## GCT-PE Superceptor 10™ Class I Oil-Water Separator

### Features

#### Class I coalescing separator for separation of all free/non-emulsified oils

- Manufactured from high grade LLDPE, SG 1.6
- One (1) sludge tank [Tank 1]
- One (1) coalescing separation tank [Tank 2]
- Auto-shut-off valve with removable coalescing media filter by outlet
- Two (2) easily accessible 450mm diameter covers
- Suitable for below ground or free-standing installations
- Designed in accordance with SANS 50858-1 & 2

**Flow Rate:** 10L/sec (SANS 50858-1 & EN 858-1, 5PPM, Class I Separator)

**Total Liquid Capacity:** 3700L

**Optimal Oil Storage Capacity:** 200L

**Max Sludge Capacity:** 2500L

**Net Weight:** ≈ 90KG

### General Applications:

Forecourts, petro-chemical plants, fuel depots, substations & light vehicle wash-bays etc