
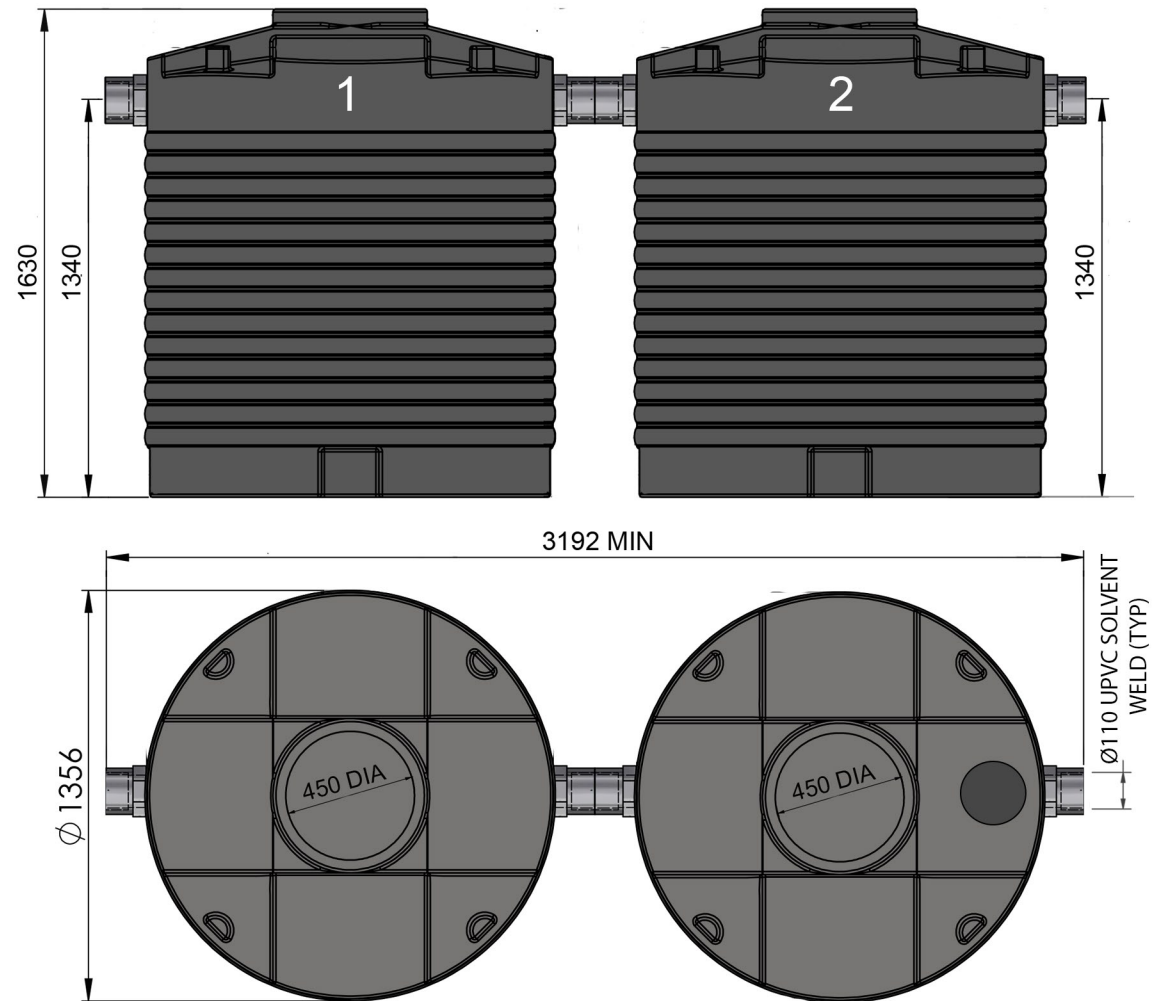


GCT-PE SUPERCEPTOR 10™ Class II

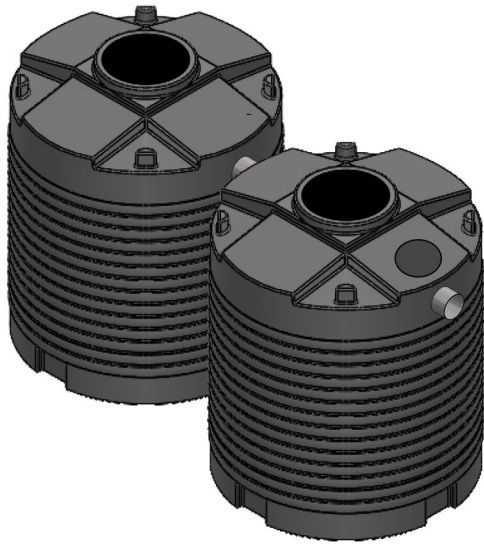

GCT-PE Superceptor 10™ Class II Oil-Water Separator

Features

Class II gravity separator for separation of all free/non-emulsified oils

- Manufactured from high grade LLDPE, SG 1.6
- One (1) sludge tank [Tank 1]
- One (1) gravity separation tank [Tank 2]
- Auto-shut-off valve by outlet (Optional)
- Two (2) easily accessible 450mm diametre covers
- Suitable for below ground or free-standing installations
- Designed in accordance with SANS 50858-1 & 2

Flow Rate: 10L/sec (SANS 50858-1 & EN 858-1, 100PPM, Class II Separator)

Total Liquid Capacity: 3700L

Optimal Oil Storage Capacity: 200L

Max Sludge Capacity: 2500L

Net Weight: ≈ 90KG

General Applications:

Forecourts, petro-chemical plants, fuel depots & substations etc