


GCT-PE SUPERCEPTOR 5™ Class I

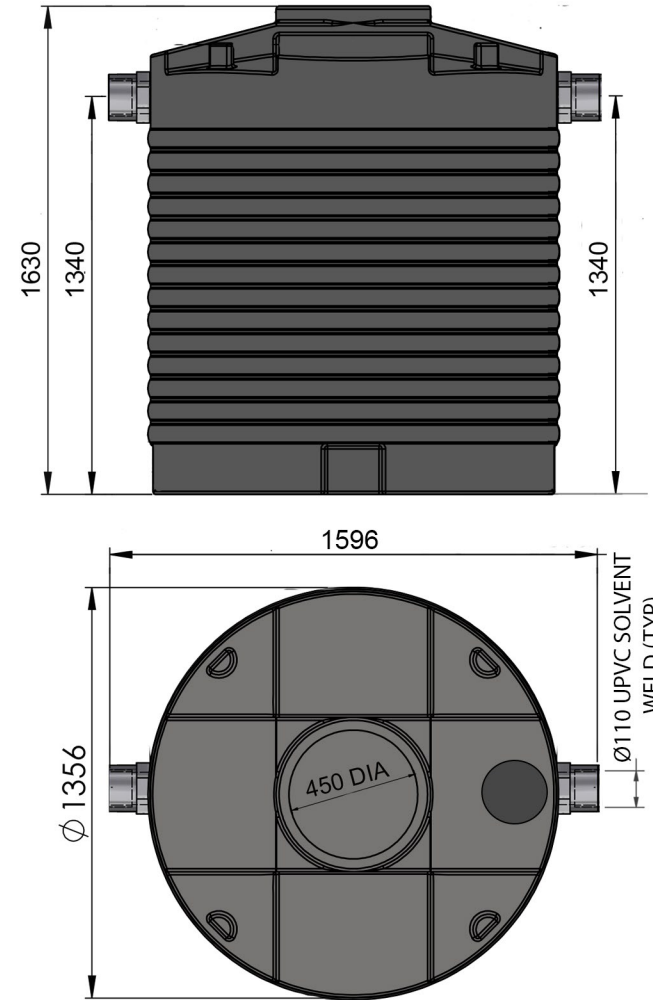

GCT-PE Superceptor 5™ Class I Oil-Water Separator

Features

Class I coalescing separator for separation of all free/non-emulsified oils

- Manufactured from high grade LLDPE, SG 1.6
- One (1) coalescing separation tank with integrated sludge compartment
- Auto-shut-off valve with removable coalescing media filter by outlet
- One (1) easily accessible 450mm diameter cover
- Suitable for below ground or free-standing installations
- Designed in accordance with SANS 50858-1 & 2

Flow Rate: 5L/sec (SANS 50858-1 & EN 858-1, 5PPM, Class I Separator)

Total Liquid Capacity: 1850L

Optimal Oil Storage Capacity: 200L

Max Sludge Capacity: 1000L

Net Weight: ≈ 55KG

General Applications:

Forecourts, petro-chemical plants, fuel depots, substations & small light vehicle wash-bays etc