
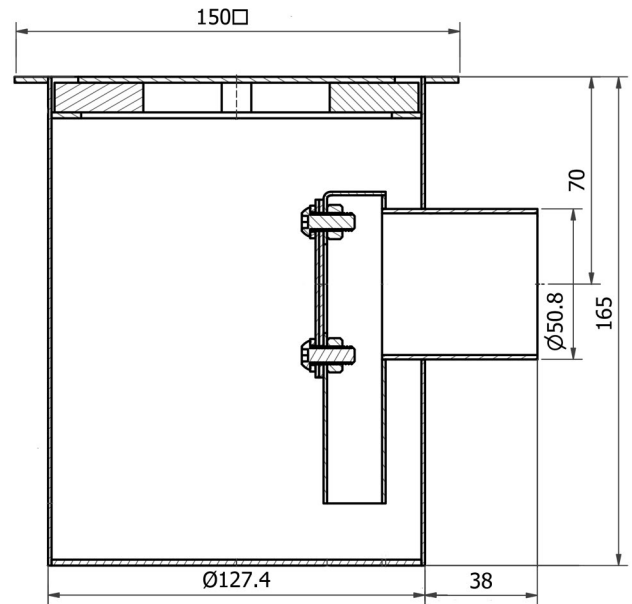


GCT 125H FLOOR DRAIN SKU:124-001-A000

Fixed height stainless steel floor drain (gully) for tiled, concrete and resin flooring in small kitchens, cold rooms, washrooms and toilet areas, etc. For applications where no waterproofing is used or waterproofing is independent of the floor drain body.

Specification

Standard (RSA): SANS 51253-1
Standard (EN): EN 1253-1
Floor: Tiles (square) or resin/ concrete (round)
Material (EN): 1.4301 (304) or 1.4404 (316)
Max flow (l/s): 1.25
Odour trap: Yes, integral, tamper-proof or plug-in
Water seal height (mm): 50
Solids basket: No
Solids basket volume (l): NA
Surface finish: Pickled and passivated, polished
Membrane type: No membrane
Adjustable: No
Load class: 300KG (K3)
Number of screws: 2 (odour trap)
Gasket: Yes
Gasket material: NBR
Number of inlets: 0
Inlet/s diameter (mm): NA
Outlet direction: Horizontal
Outlet diameter (mm): 50.8
Minimum height (mm): 165
Body diameter (mm): 127
Overall dimensions (mm): 150 l X 165 w X 165 h
Weight (kg): 1.6

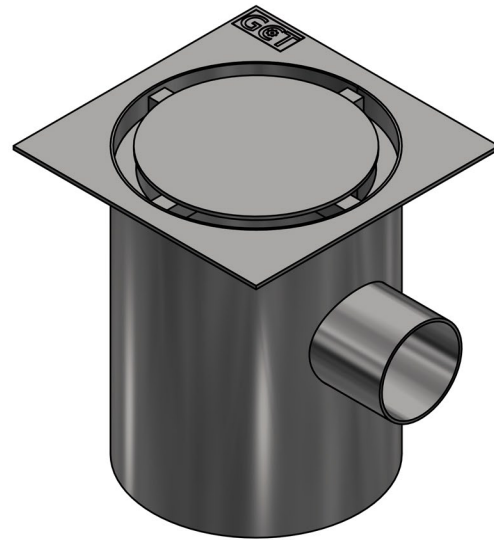

Order Sheet:

Please mark option/s in each box with an X. * (asterisk) indicates special order. If no options are selected the product is supplied as standard.

MATERIAL	FLANGE SHAPE	ODOUR TRAP TYPE
select one X	select one X	select one X
<input type="checkbox"/> 304 <input type="checkbox"/> 316*	<input type="checkbox"/> SQUARE (FOR TILES) <input type="checkbox"/> ROUND* (FOR RESIN/ CONCRETE)	<input type="checkbox"/> TAMPER-PROOF <input type="checkbox"/> PLUG-IN* <p>Note: Tamper-proof odour traps (water seals) utilize hex screws and are partially removable with an allen key wrench. Plug-in water seals utilize a rubber bung and are fully removable by hand.</p>

Qty:	Name:	Signature:	Date:	Company:	PO no:
------	-------	------------	-------	----------	--------