


## GCT-2G 1200 GREASE TRAP SKU:176-001-A000

Stainless steel grease trap (grease interceptor) for free-standing installation at commercial kitchens, restaurants, supermarkets and food processing areas, etc. Designed to treat greasy wastewater from 1 to 2 fixtures with a total flow rate  $\leq 4.5$  litres/ second.

### Specification

Standard (RSA): SANS 10252-2  
 Material (EN): 1.4301 (304) or 1.4404 (316)  
 Tank wall thickness (mm): 1.2  
 Surface finish: Pickled and passivated, polished  
 Flow rate (l/s): 4.5  
 Max grease capacity (l): 55  
 Solids basket: Yes, 1 of  
 Basket volume (l):  $\approx 20$   
 Basket dimensions (mm): 317 l X 340 w X 284 h  
 Total static water volume (l):  $\approx 216$   
 No. of lids: 1  
 Lid seal: Yes, EPDM  
 Lid sealing mechanism: Fasteners  
 Lids load class: None (non-trafficable lid)  
 Inlet/ Outlet diameter (mm): 50.8  
 Overall dimensions (mm): 1350 l X 400 w X 765 h  
 Height from bottom to inlet centre (mm): 607  
 Height from bottom to outlet centre (mm): 557  
 Weight (kg): 39.5

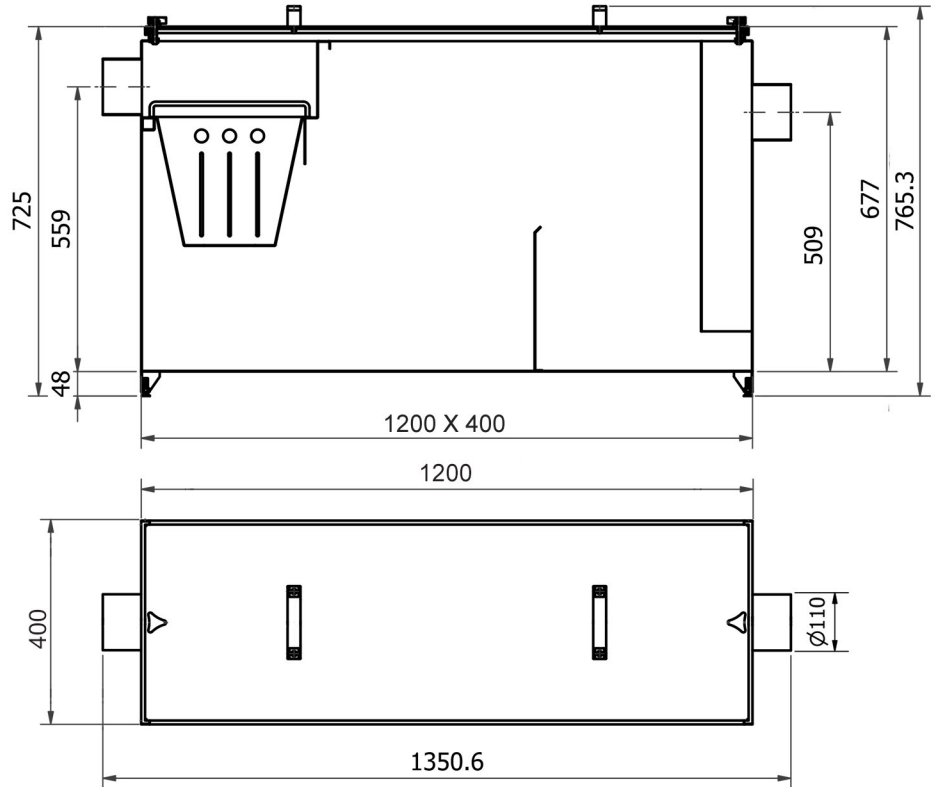

### Order Sheet:

Please mark option/s in each box with an X. \* (asterisk) indicates special order. If no options are selected the product is supplied as standard.

MATERIAL	LEGS	INLET/OUTLET SIZE
select one <b>X</b>	select one <b>X</b>	select one <b>X</b>
<input type="checkbox"/> 304 <input type="checkbox"/> 316*	<input type="checkbox"/> YES <input type="checkbox"/> NO*	NOT APPLICABLE
Note: Legs are manufactured with adjustable feet.		

Qty:	Name:	Signature:	Date:	Company:	PO no:
------	-------	------------	-------	----------	--------