





GCT-2G K1700 GREASE TRAP SKU:131-001-A000

Stainless steel grease trap (grease interceptor) for free-standing installation at commercial kitchens, restaurants, supermarkets and food processing areas, etc. Designed to treat greasy wastewater laden with high solids at a total flow rate ≤ 4.5 litres/ second.

Specification

- Standard (RSA): SANS 10252-2
- Material (EN): 1.4301 (304) or 1.4404 (316)
- Tank wall thickness (mm): 1.2
- Surface finish: Pickled and passivated, polished
- Flow rate (l/s): 4.5
- Max grease capacity (l): 55
- Solids basket: Yes, 3 of
- Baskets volume total (l): ≈ 200
- Basket dimensions - largest (mm): 481 l X 337 w X 633 h
- Total static water volume (l): ≈ 279
- No. of lids: 1
- Lid seal: No
- Lid sealing mechanism: Fasteners
- Lids load class: None (non-trafficable lid)
- Inlet/ Outlet diameter (mm): 110
- Overall dimensions (mm): 1885 l X 403 w X 836 h
- Height from bottom to inlet centre (mm): 607
- Height from bottom to outlet centre (mm): 557
- Weight (kg): 84.5

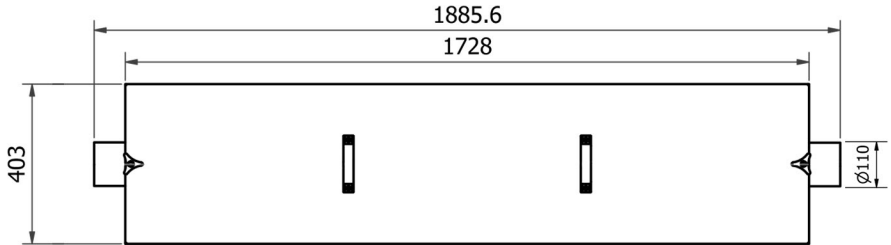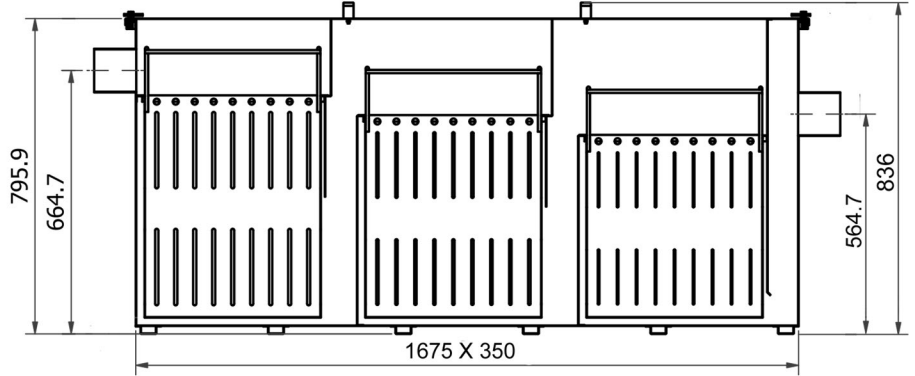

Order Sheet:

Please mark option/s in each box with an X. * (asterisk) indicates special order. If no options are selected the product is supplied as standard.

MATERIAL	LEGS	INLET/OUTLET SIZE
select one X	select one X	select one X
<input type="checkbox"/> 304 <input type="checkbox"/> 316*	NOT APPLICABLE	NOT APPLICABLE

Qty:	Name:	Signature:	Date:	Company:	PO no:
------	-------	------------	-------	----------	--------