



GCT SL150 SLUDGE TRAP

SKU:184-001-A000

Stainless steel sludge trap (grit tank) for underground or free-standing installation, for parts wash-down areas, vehicle wash-bays, surface runoff, substations, etc.
Designed to remove sand, silt, and grit, etc, from wastewater before it enters an oil-water separator. Adequately sized sludge traps, as per SANS 50858-2, should be installed upstream of separators for wastewater containing high concentrations of dirt.

Specification

Standard (RSA): EN 50858-1
Standard (EN): EN 858-1
Material (EN): 1.4301 (304) or 1.4404 (316)
Tank wall thickness (mm): 1.5
Surface finish: Pickled and passivated, polished
Size (l): 150
Total static water volume (l): ≈ 166
No. of lids: 1
Lid seal: No
Lid load class: None (non-trafficable lid)
Separation technology: Gravity sedimentation
Inlet/ Outlet diameter (mm): 110
Overall dimensions (mm): 1060 l X 553 w X 647 h
Height from bottom to inlet centre (mm): 456
Height from bottom to outlet centre (mm): 456
Weight (kg): 40.0

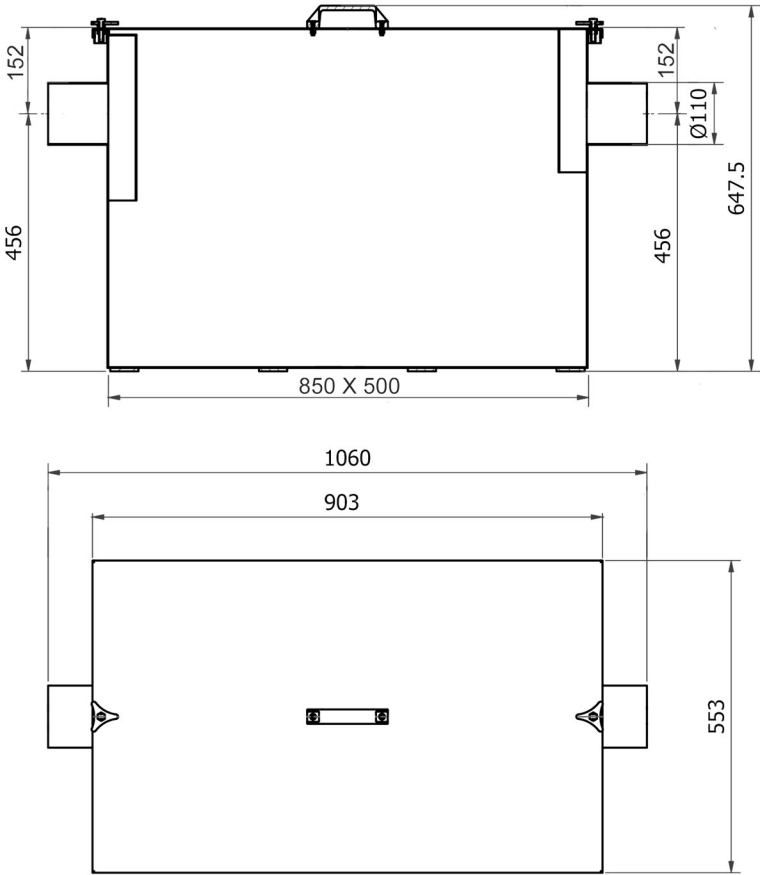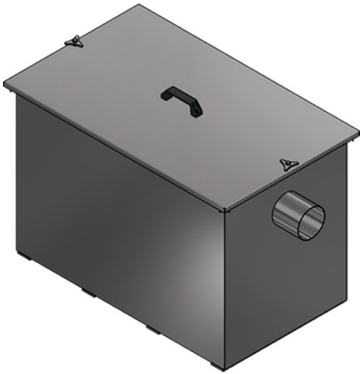

Order Sheet:

Please mark option/s in each box with an X. * (asterisk) indicates special order. If no options are selected the product is supplied as standard.

MATERIAL	
select one X	
☐	304
☐	316*

Qty:	Name:	Signature:	Date:	Company:	PO no:
------	-------	------------	-------	----------	--------