


## GCT SL600 SLUDGE TRAP


### SKU:190-001-A000

Stainless steel sludge trap (grit tank) for underground or free-standing installation, for parts wash-down areas, vehicle wash-bays, surface runoff, substations, etc. Designed to remove sand, silt, and grit, etc, from wastewater before it enters an oil-water separator. Adequately sized sludge traps, as per SANS 50858-2, should be installed upstream of separators for wastewater containing high concentrations of dirt.

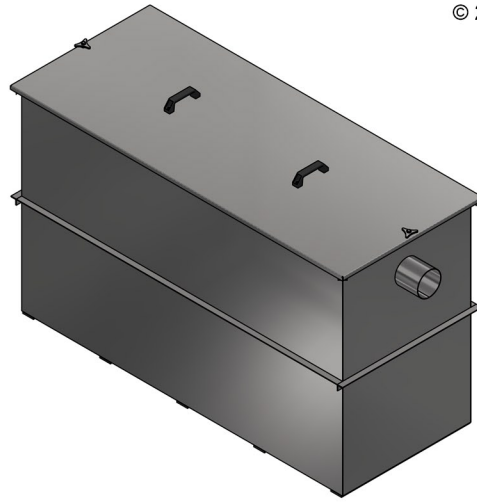

### Specification

Standard (RSA): EN 50858-1  
Standard (EN): EN 858-1  
Material (EN): 1.4301 (304) or 1.4404 (316)  
Tank wall thickness (mm): 1.5  
Surface finish: Pickled and passivated, polished  
Size (l): 600  
Total static water volume (l): ≈ 631  
No. of lids: 1  
Lid seal: No  
Lid load class: None (non-trafficable lid)  
Separation technology: Gravity sedimentation  
Inlet/ Outlet diameter (mm): 110  
Overall dimensions (mm): 1710 l X 653 w X 960.5 h  
Height from bottom to inlet centre (mm): 769  
Height from bottom to outlet centre (mm): 769  
Weight (kg): 87.3

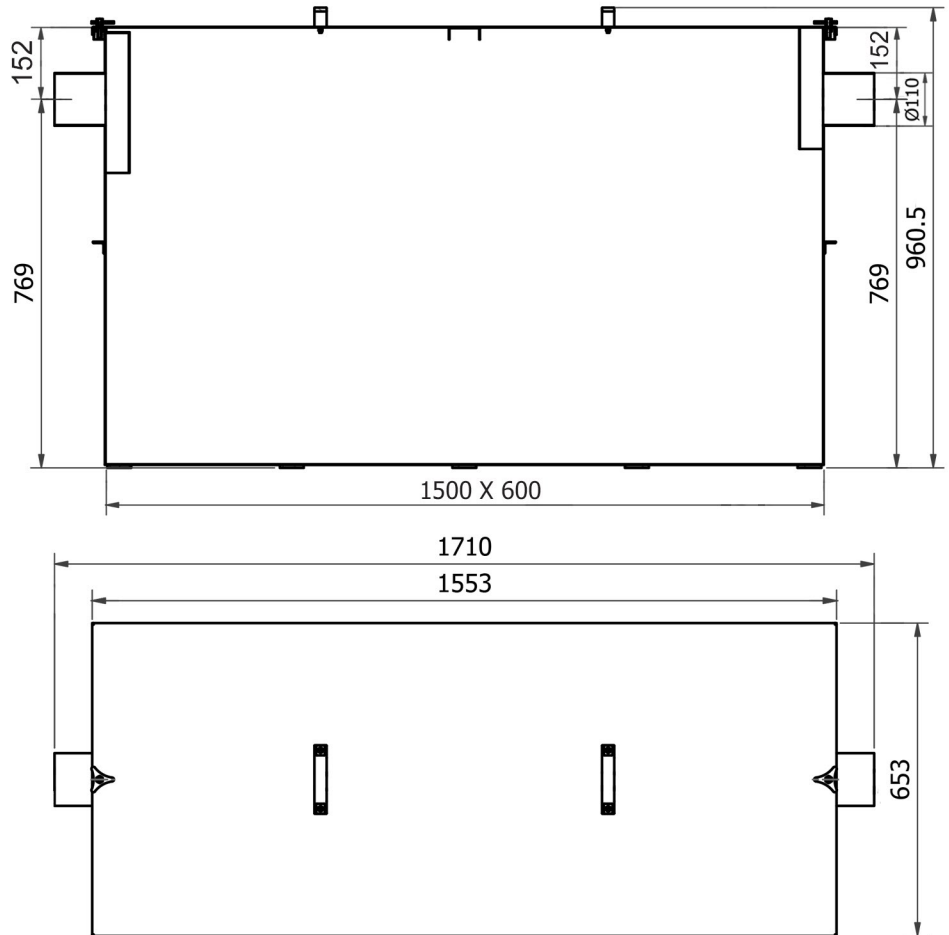

### Order Sheet:

Please mark option/s in each box with an X. \* (asterisk) indicates special order. If no options are selected the product is supplied as standard.

| MATERIAL                 |      |
|--------------------------|------|
| select one <b>X</b>      |      |
| <input type="checkbox"/> | 304  |
| <input type="checkbox"/> | 316* |

|      |       |            |       |          |        |
|------|-------|------------|-------|----------|--------|
| Qty: | Name: | Signature: | Date: | Company: | PO no: |
|------|-------|------------|-------|----------|--------|